


THERMOSTAT SENSOR AND ACRYLIC GUARD INSTALLATION INSTRUCTIONS

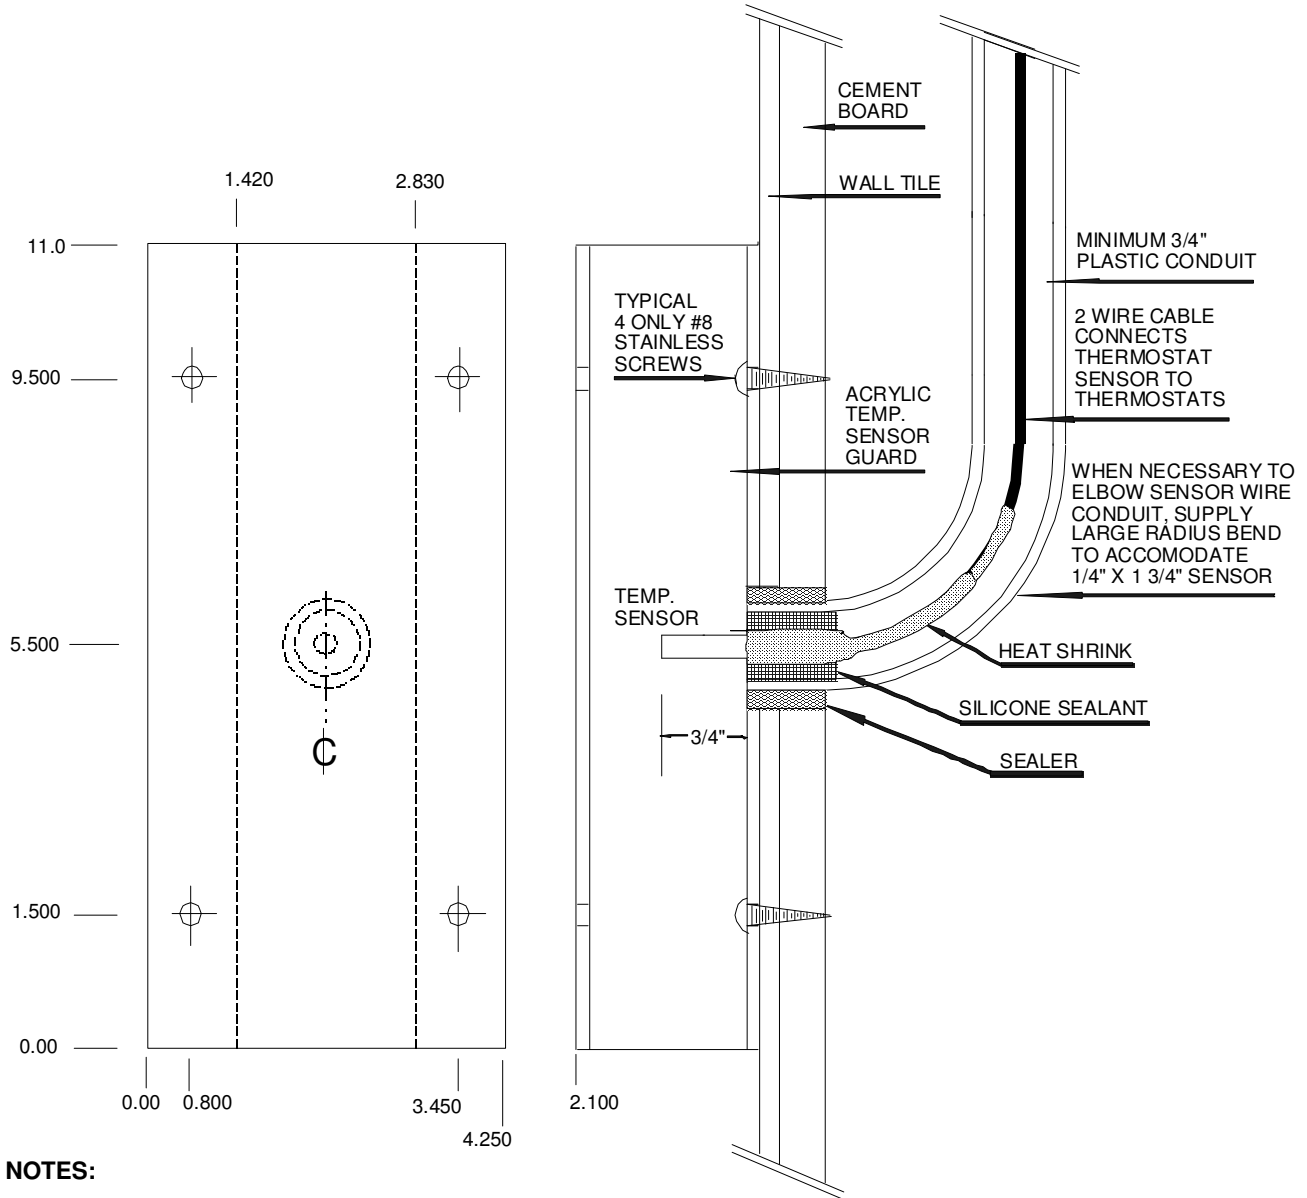

NOTES:

1. Temperature sensor should be installed 5 feet above the finished floor or at the shoulder height of a person sitting on the highest level provided.
2. Temperature sensor should be protruding into the steam room 3/4" (see drawing).
3. For more accurate sensing, DO NOT locate the temperature sensor above the steam nozzle area or on the ceiling.
4. The conduit for the temperature sensor and wire must be of a material that will not rust (plastic is suggested).
5. The screws used to mount the sensor guard should be of a material that will not rust (stainless is suggested).

LEISURE BATHS LTD.	
THERMOSTAT SENSOR AND ACRYLIC GUARD FOR ELECTRONIC THERMOSTAT	
15/08/94	<small>ALL MEASUREMENTS IN INCHES</small>
DATE	NOT TO SCALE
DRAWING #55200-1	